

FC-130RA/SA



Carbon-brush motors


OUTPUT : 0.2W~9.0W (APPROX)

WEIGHT : 17g (APPROX)

Typical Applications Home Appliances : Styling Brush
 Precision Instruments : Mini Printer
 Toys and Models : Radio Control Model

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	mN-m	g-cm	W	mN-m	g-cm	A
FC-130RA-2270	2.4~3.0	3V CONSTANT	18500	0.36	14170	1.18	0.92	9.4	1.36	3.92	40	3.85
FC-130RA-10300	4.5~12.0	12V CONSTANT	18000	0.080	13760	0.26	0.90	9.2	1.30	3.83	39	0.84
FC-130SA-2270	3.0~4.5	3V CONSTANT	13500	0.27	10740	1.05	1.37	14.0	1.54	6.71	68	4.10


DIRECTION OF ROTATION

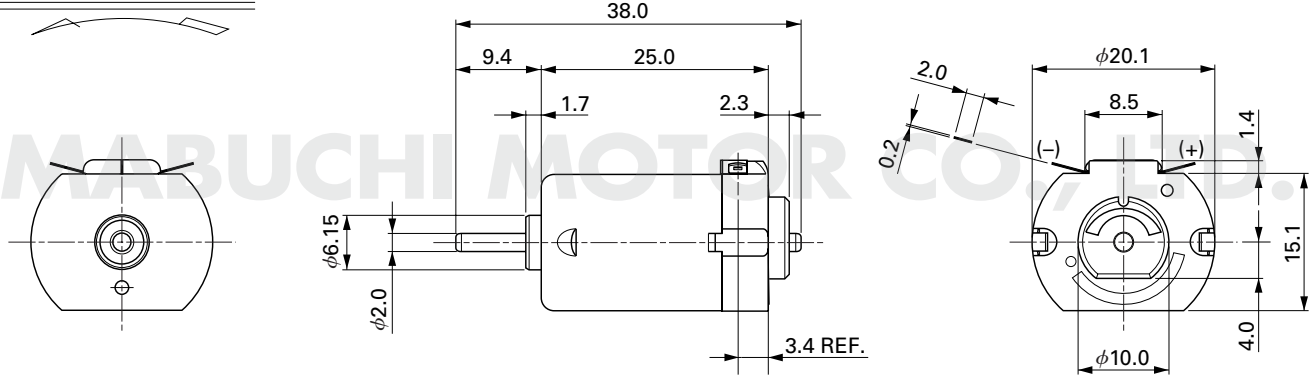

UNIT: MILLIMETERS

FC-130RA-2270

3.0V

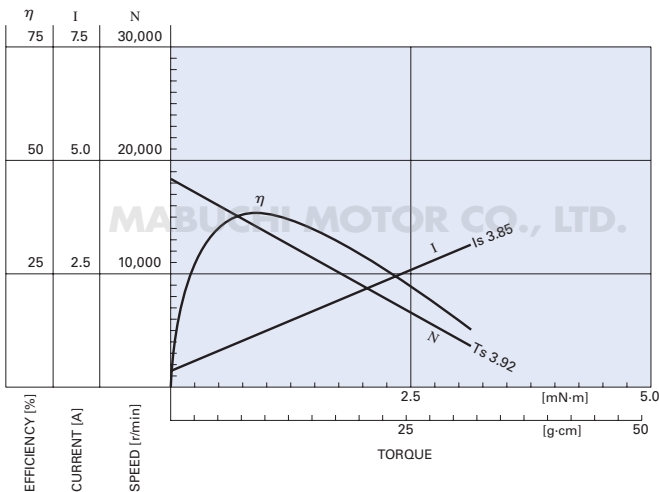

FC-130SA-2270

3.0V

