

EMI/EMC FILTER

TY1/SQ5 SERIES



FEATURES

- 3-phase, 4-line type.
- Good shield effect by using metal case.
- Epoxy molded for reliability.
- Compact and economical.

※ UL Listed : SQ5 Only.


APPLICATIONS

- Digital equipments.
- Suitable for FA equipments.
- Computerized washing machines.
- Industrial equipments like UPS, inverters, converters.

SPECIFICATIONS

Model	Rated Voltage (AC)	Rated Current	Leakage Current (420V AC)	Temperature Rise	Operating Temperature
TY1-F03	420V	3A	1.0mA max.	30°C max.	-25°C to + 85°C Including temperature rise ※ Fig.1
TY1-F08	420V	8A	1.0mA max.	40°C max.	
SQ5-T/F16	420V	16A	4.0mA max.	45°C max.	

Note : Test voltage : 1500V AC one minute, line to earth.
 Insulation Resistance : 300 Mohm min. at 500V DC.
 Voltage Drop : 1V max. at rated current.
 Weight : 250g for TY1-Series.
 1450g for SQ5-Series.



※ Fig.1

■ Model Number Construction

TY1

Case Style/3-Phase Filter
 TY1: See Dimension next page
 SQ5: See Dimension next page

F


Input/Output Terminal Style
 F : Faston Tab #250
 T : M4 Stud

03


Current Rating : AC rms
 03 : 3 amp (TY1-Series Only)
 08 : 8 amp (TY1-Series Only)
 16 : 16 amp (SQ5-Series Only)

Shapes and Dimensions

* TY1 Series

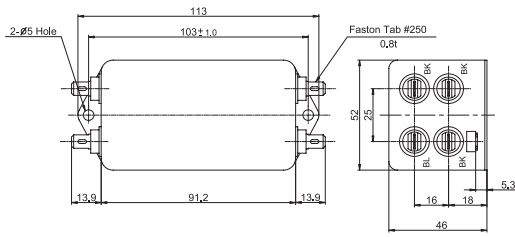


* SQ5 Series

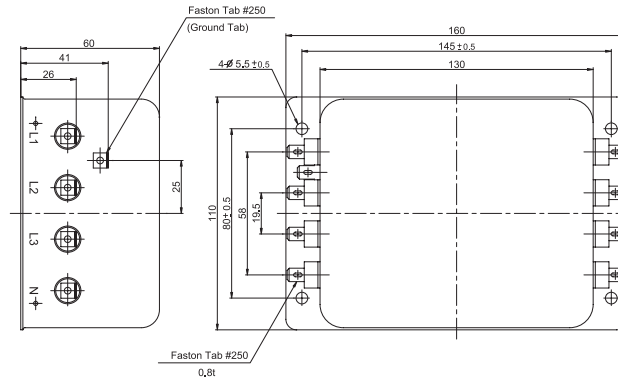


- * General tolerance : ± 1.5
- * Unit : mm
- * Metal Case

Attenuation Characteristics


● Common Mode

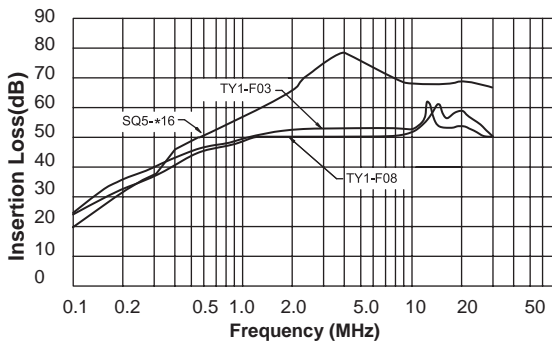


● Differential Mode

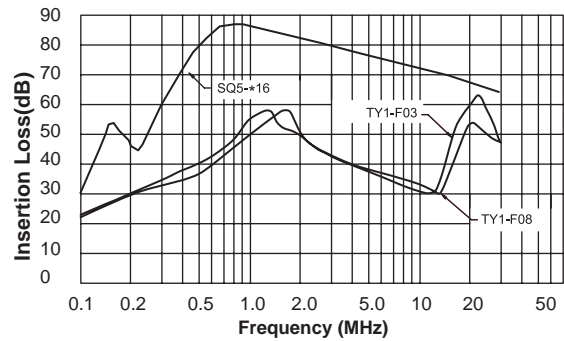

● Circuit Diagram (TY1 Series)

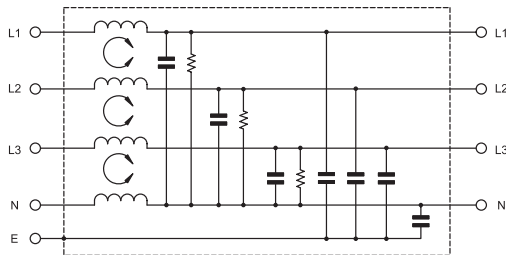

● Circuit Diagram (SQ5 Series)

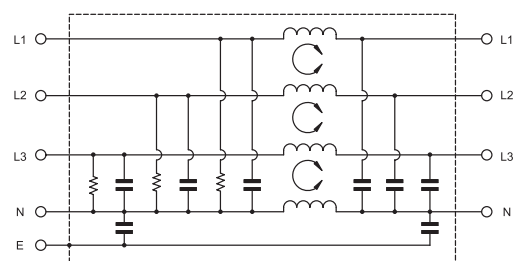

● Measurement configuration

