



cUL US E173485

■ Features

- 2 to 3 pole configurations
- Conform to RoHS,ELV directive

■ Ordering Code

HJQ-22F — 2Z (P) — F — D / 12VDC					
1	2	3	4	5	6
1. Relay Model	2. Contact Form: 2Z: Form 2C, 3Z: Form 3C	3. P: PCB Type, Nil: B Type	4. F: Flange Type, Nil: Standard		
5. D: With LED, Nil: Standard	6. Coil Nominal Voltage: 5, 6, 12, 24, 48, 110VDC; 6, 12, 24, 48, 110, 120, 220/240VAC				

■ Coil Data (at 20°C)

Nominal Voltage(VDC)	5	6	12	24	48	110/120	220/240	0.9W
Coil Resistance(Ω)	28	40	160	640	2560	11000		
Rated Current(mA)	178.5	150	75	37.5	18.75	10		
Max Operate Voltage(VDC)	3.75	4.5	9	18	36	82.5		
Min Release Voltage(VDC)	0.5	0.6	1.2	2.4	4.8	11		
Nominal Voltage(VAC)		6	12	24	48	110/120	220/240	1.2VA
Coil Resistance(Ω)		11.5	46	184	735	4550	14400	
Max Operate Voltage(VAC)		4.8	9.6	19.2	38.4	88	176	
Min Release Voltage(VAC)		1.2	2.4	4.8	9.6	22	44	
Max Applicable Voltage	130% of nominal voltage at 70°C, 170% of nominal voltage at 23°C							

 Note: Coil Resistance Tolerance of $\pm 10\%$ for 5-24VDC/6-48VAC, Coil Resistance Tolerance of $\pm 15\%$ for 48-110VDC/110-240VAC.

■ Contact Data

Contact Form	2Z/3Z
Contact Material	Silver Alloy
Load	Resistive Load(COS ϕ =1)
Contact Ratings	7A 240VAC 7A 30VDC
Minimum Load	100mA 5VDC
Max Switching Voltage	240VAC/30VDC
Max Switching Current	7A
Max Switching Power	1680VA/210W
Contact Resistance	100mΩMax at 6VDC 1A
Life Expectancy	Electrical: 100,000 Operations (at 30 Operations/minute)
	Mechanical: 10,000,000 Operations (at 300 Operations/minute)




■ Approved Standards

Model	Coil Rating	Safety Standard	Contact Rating
HJQ-22F	12 to 110VDC	UL/cUL	7A 240VAC 7A 30VDC
	24 to 240VAC		
	24 to 240VAC		
	12 to 110VDC	CQC	5A 240VAC 5A 28VDC
120 to 240VAC			


■ Characteristics Data

Insulation Resistance	100M Ω Min at 500VDC
Dielectric Strength Between Open Contacts	1000VAC (for one minute)
Between Contacts and Coil	1500VAC (for one minute)
Operate Time	25ms
Release Time	25ms
Temperature Range	-40°C to +70°C
Shock Resistance	Operating Extremes: 20G Damage Limits: 100G
Vibration Resistance	10-55Hz, 1.5mm
Max. Switching Frequency	Mechanical: 18,000 operations/hr Electrical: 1,800 operations/hr
Humidity	40-85%
Weight	Approx: 35g
Safety Standard	UL cUL CQC


■ Engineering Data

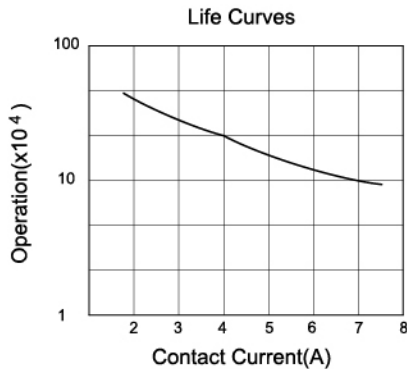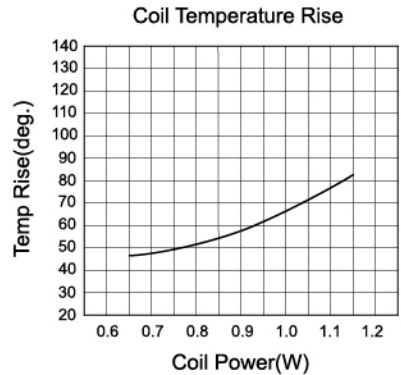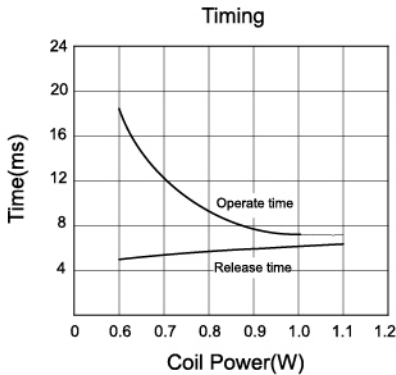


Overall and Mounting Dimensions

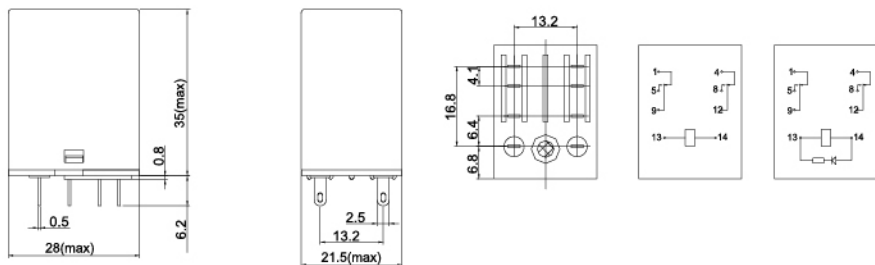


B Type

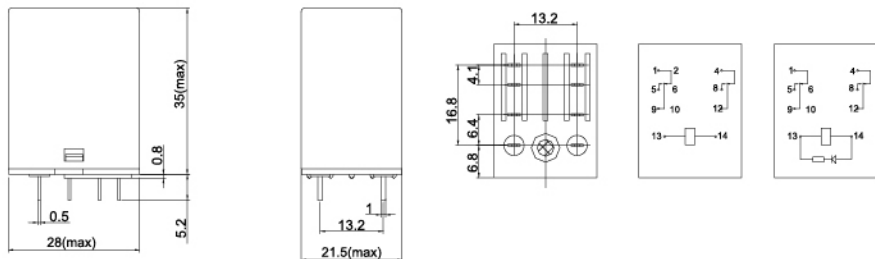

P Type

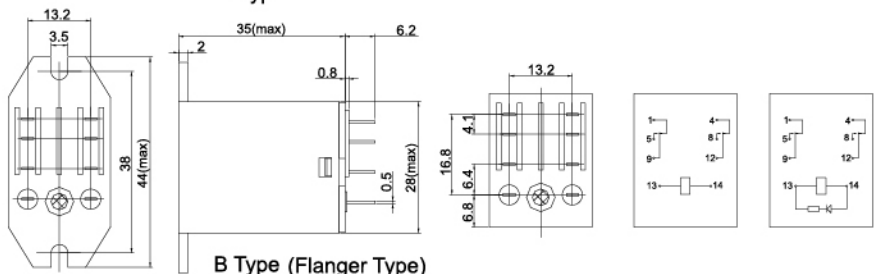

B Type (Flanger Type)

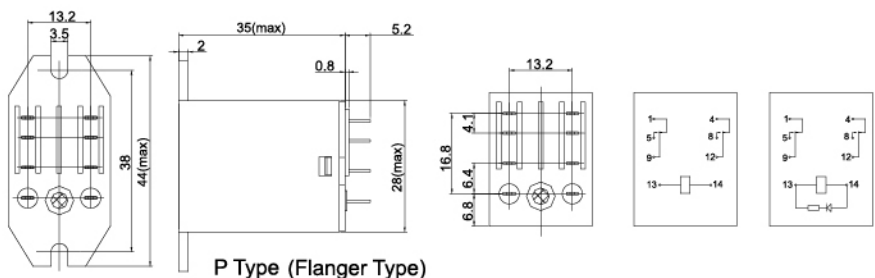

P Type (Flanger Type)

Remark:

- 1). In case the tolerance is not shown in outline dimension, the tolerance should be $\pm 0.2\text{mm}$ for outline dimension $\leq 1\text{mm}$; $\pm 0.3\text{mm}$ for outline dimension: $1\sim 5\text{mm}$ and $\pm 0.4\text{mm}$ for outline dimension $> 5\text{mm}$.
- 2). The tolerance without indication is always $\pm 0.1\text{mm}$ for the dimension of PCB layout.

Disclaimer:

These specifications are just for customers' reference and subject to change without notice.