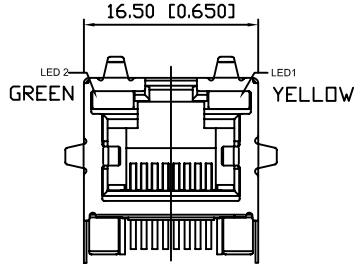

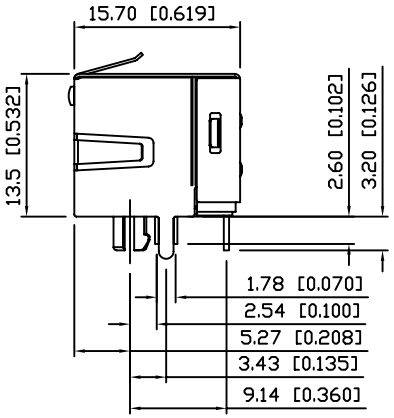

NOTES:
1. MATERIALS:
   HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, BLACK, UL 94V-0
   CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN ON TERMINATION END, 15u" GOLD ON CONTACT AREA.
   SHIELD: BRASS, NICKEL PLATING.
2. OPERATING TEMPERATURE: -40°C ~ +85°C
3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

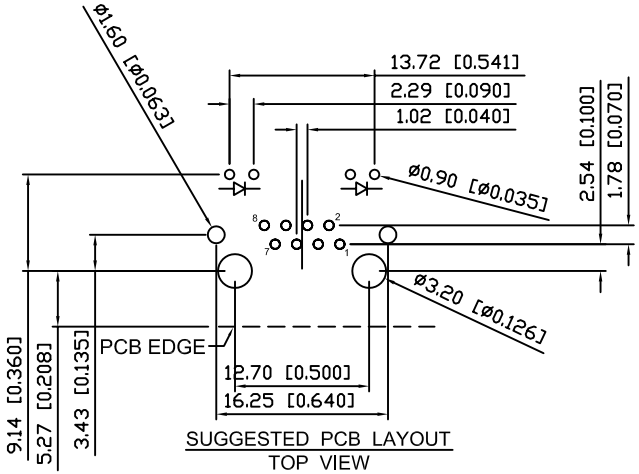

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]



RECOMMENDED
PANEL CUTOUT DIMENSION

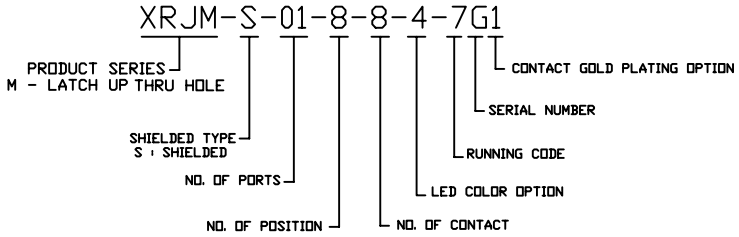

RoHS Compliant

XMULTIPLE — THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347,Yang Guang St.,
Neihu , Taipei , Taiwan 11475

XMULTIPLE USA
1420 Los Angeles Ave., Suite G,
Simi Valley, CA 93065

G/NO: 81

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG NO: XRJM-S-01-8-8-4-7G1

TITLE: RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole,

DRAWN: LEON

PART NO: XRJM-S-01-8-8-4-7G1

CHKD: JEFF

UNIT	SHEET	REV
mm[inch]	1 of 1	01

DATE: Jun.13,07